



Extensions and angular heads series 1124 – mov. 4 mm (short version)


Extension and angular heads with insertion depth up to middle movement 23 mm

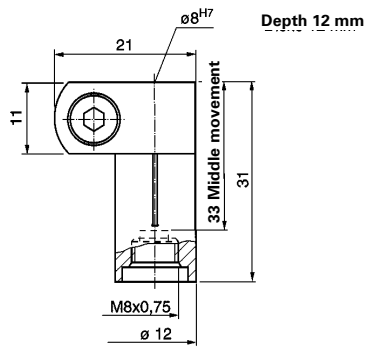


Article-No. 1124 01 (0°)




Article-No. 1124 02 (30°)

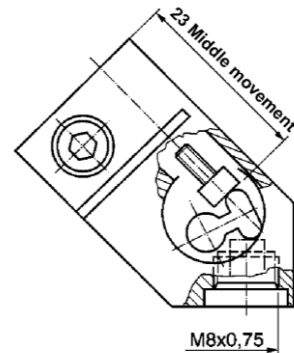

Article-No. 1124 03 (45°)



Article-No. 1124 04 (60°)



Article-No. 1124 05 (90°)

Art.-no. for angular heads series 1124 complete with ext. insertions

Angle	Type	Length L	Article-No.	Angle	Type	Length L	Article-No.
0°	G	15	1124 01 G 015	0°	P	15	1124 01 P 015
0°	G	25	1124 01 G 025	0°	P	25	1124 01 P 025
0°	G	50	1124 01 G 050	0°	P	50	1124 01 P 050
0°	G	75	1124 01 G 075	0°	P	75	1124 01 P 075
0°	G	100	1124 01 G 100	0°	P	100	1124 01 P 100
0°	G	125	1124 01 G 125	0°	P	125	1124 01 P 125
0°	G	150	1124 01 G 150	0°	P	150	1124 01 P 150
0°	G	175	1124 01 G 175	0°	P	175	1124 01 P 175
0°	G	200	1124 01 G 200	0°	P	200	1124 01 P 200
30°	G	15	1124 02 G 015	30°	P	15	1124 02 P 015
30°	G	25	1124 02 G 025	30°	P	25	1124 02 P 025
30°	G	50	1124 02 G 050	30°	P	50	1124 02 P 050
30°	G	75	1124 02 G 075	30°	P	75	1124 02 P 075
30°	G	100	1124 02 G 100	30°	P	100	1124 02 P 100
30°	G	125	1124 02 G 125	30°	P	125	1124 02 P 125
30°	G	150	1124 02 G 150	30°	P	150	1124 02 P 150
30°	G	175	1124 02 G 175	30°	P	175	1124 02 P 175
30°	G	200	1124 02 G 200	30°	P	200	1124 02 P 200
45°	G	15	1124 03 G 015	45°	P	15	1124 03 P 015
45°	G	25	1124 03 G 025	45°	P	25	1124 03 P 025
45°	G	50	1124 03 G 050	45°	P	50	1124 03 P 050
45°	G	75	1124 03 G 075	45°	P	75	1124 03 P 075
45°	G	100	1124 03 G 100	45°	P	100	1124 03 P 100
45°	G	125	1124 03 G 125	45°	P	125	1124 03 P 125
45°	G	150	1124 03 G 150	45°	P	150	1124 03 P 150
45°	G	175	1124 03 G 175	45°	P	175	1124 03 P 175
45°	G	200	1124 03 G 200	45°	P	200	1124 03 P 200
60°	G	15	1124 04 G 015	60°	P	15	1124 04 P 015
60°	G	25	1124 04 G 025	60°	P	25	1124 04 P 025
60°	G	50	1124 04 G 050	60°	P	50	1124 04 P 050
60°	G	75	1124 04 G 075	60°	P	75	1124 04 P 075
60°	G	100	1124 04 G 100	60°	P	100	1124 04 P 100
60°	G	125	1124 04 G 125	60°	P	125	1124 04 P 125
60°	G	150	1124 04 G 150	60°	P	150	1124 04 P 150
60°	G	175	1124 04 G 175	60°	P	175	1124 04 P 175
60°	G	200	1124 04 G 200	60°	P	200	1124 04 P 200
90°	G	15	1124 05 G 015	90°	P	15	1124 05 P 015
90°	G	25	1124 05 G 025	90°	P	25	1124 05 P 025
90°	G	50	1124 05 G 050	90°	P	50	1124 05 P 050
90°	G	75	1124 05 G 075	90°	P	75	1124 05 P 075
90°	G	100	1124 05 G 100	90°	P	100	1124 05 P 100
90°	G	125	1124 05 G 125	90°	P	125	1124 05 P 125
90°	G	150	1124 05 G 150	90°	P	150	1124 05 P 150
90°	G	175	1124 05 G 175	90°	P	175	1124 05 P 175
90°	G	200	1124 05 G 200	90°	P	200	1124 05 P 200

Information

We provide also matching holders for dial indicator (see page 33) and extension insertions of series 1127 (see page 27).

Type with expansion bellows: Additional remark "F". Example: 1124 05 P 025 F

(Not for extension length 15 mm.)